


Nano-S

The smallest console remote control in the NBB product range, available in various versions.



Technical information

Frequency band (F-Band):	434,050 – 434,750 Mhz
Frequency band EU (G-Band):	866 – 870 MHz
Frequency band USA:	915 MHz
RF output:	< or = 10 mW
Operating range:	≤ 300 m
Antenna:	integrated
Response time of control command:	15 ms
SMJ-Technology 	–
Advance alert "battery empty":	15 minutes
Datafeedback:	–

SMJ technologies (Surface Mounted Joystick)

Change of joystick without opening the housing, easy to make a replacement service, anti twist protection
(for more information, see "Technology")

Machine data

Operating temperature range:	-20 to +65°C
Weight:	690 g
Status indication:	LEDs

Equipment safety

CE label:	yes
IP-Protection Class:	IP65

Options

LBT frequency search

When switching on or when switching the frequency, a check is made to determine whether the frequency channel used is reserved by another transmitter. If this is the case, the next frequency channel is checked until it is ensured that the transmitter can operate without faults.

LBT is short for Listen before Talk.

Power Supply

NBB battery system ①


Quick-change battery system:	NiMH / 1500 mAh
Voltage:	7,2 V
Operating time:	60 hours/battery charge
Charging time approx.:	1 hour
Charging technology:	external via charger
Measurements:	126 x 47 x 18 mm
Weight:	195 g

Additional Information:

Self-cleaning contacts of the battery

Wear parts are always on the battery side

Temperature measurement for an improved recharging

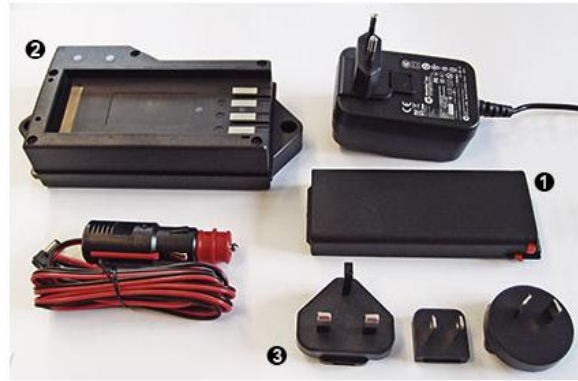

Accessories

Practical carrying system

practical carrying system with
waist- and neckbelt

