

Model TIANCHEN

OCS-S series

Tianchen®



Features:

- ❑ Aluminum die-casting case
- ❑ LCD display with backlight
- ❑ American standard eye hook
- ❑ Stainless steel shackle
- ❑ AA*3 battery
- ❑ Capacity : 100kg-1000kg

Functions:


- ❑ Zero
- ❑ Tare In/ Tare Out
- ❑ Hold
- ❑ Battery Supervision
- ❑ Overload Alarm/ Record
- ❑ Digital Calibration
- ❑ 3-point Linearity Correction
- ❑ lb/kg Switch
- ❑ Resolution switch
- ❑ Gravity Acceleration Set

Specifications:

Accuracy class	OIML III
Tare range	100%F.S.
Zero range	4%F.S.
Safe overload	120%F.S.
Ultimate overload	400%F.S.
Overload alarm	100%F.S.+9e
Battery	AA*3
Battery life	>100h
Temperature range	-10℃~40℃

Size and weight:

Max. Cap (kg)	Accuracy	A mm	B mm	C mm	L mm	N.W (kg)
300kg	0,1kg	20	43	25	220	1
500kg	0,2kg	20	43	25	220	1
1000kg	0,5kg	20	43	27	230	1.4

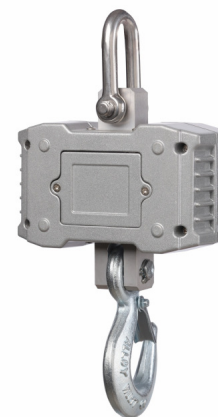

Dimensions:

